





Cejipac Sdn. Bhd.

Container Loading & Securing Plan For Palletised Cargo

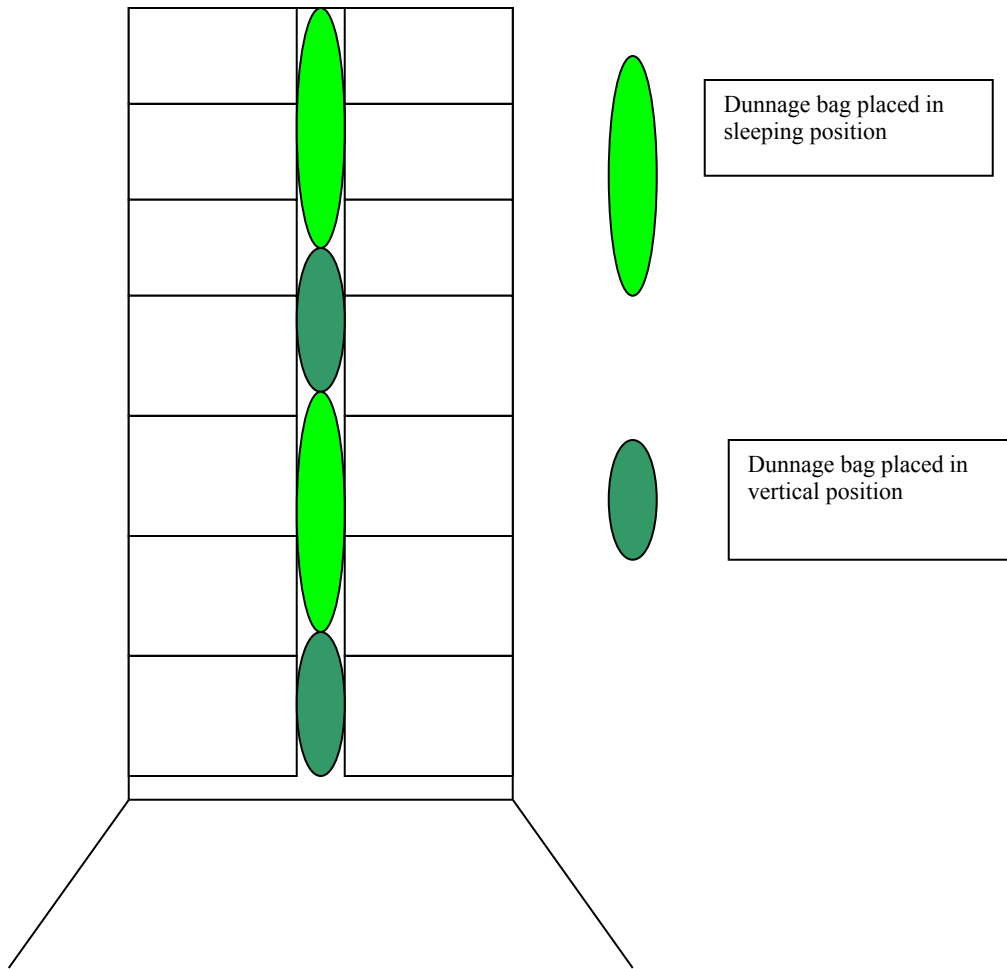

Plan View

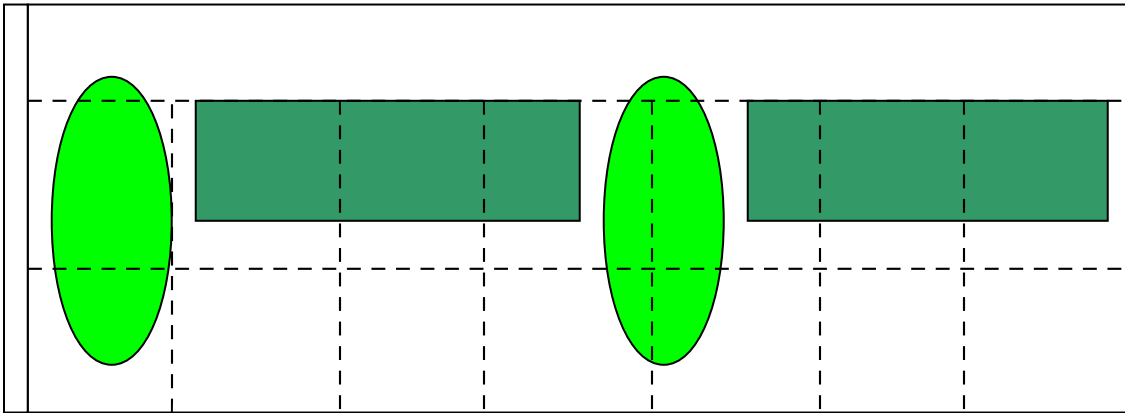

Side -View

Cargo Details And Securement Plan:

1. Palletised with corner posts and shrink wrapped
2. Size: 1000 x 800 x 1000(h) mm
3. Estimated weight : 500kg/pallet
4. Loading plan: 7 rows and 2 layers with gap(approx 35cm) down the middle of container
5. Plan to use 4 pcs of 90x 180cm wpp dunnage air bags for securement. Two placed in sleeping positions and two in the vertical position right down the middle between the two columns of pallets.

Loading and securing steps:

1. Ensure that all the pallets are touching each other and the container walls during loading .Continue to load all the pallets have till finished.
2. One dunnage bag is placed in sleeping position about 10cm from the end wall of the container and at the height of top layer pallet . The bag must not protrude above the palletized cargo.
- 3 Sandwich the dunnage bag between two pieces of cardboard(used or new) to prevent puncture by sharp protrusion from the pallet or strapping seals .
- 4 Inflate the dunnage bag till the pallets on both sides are very tightly wedged against the container walls or you just start to hear the container wall starting to creak .
- 5 Leave a space of about 10cm and place another bag vertically . Place it in such a way that the top of the bag protrude from the top of the cargo by about 5-10cm.
- 6 Sandwich the bag between 2 cardboards and inflate till the pallets at the sides are tightly wedged against the container walls.

- 7 Move about 10cm away and repeat Step 2 with another dunnage bag placed in a sleeping position.
- 8 Repeat Step 5 with the last dunnage bag which will be vertically at the door end of the container.

157 Road 5, Minden Heights ,11700 Gelugor, Penang, Malaysia.
Tel: 604-6580157 Fax: 604-6580157